



ML 221 S ~ Satin Stainless Steel Towel Rail (Mounting System)

50 x 50 x 13mm Cover Flange & Rail Mount with Concealed Wall Fixing Plate

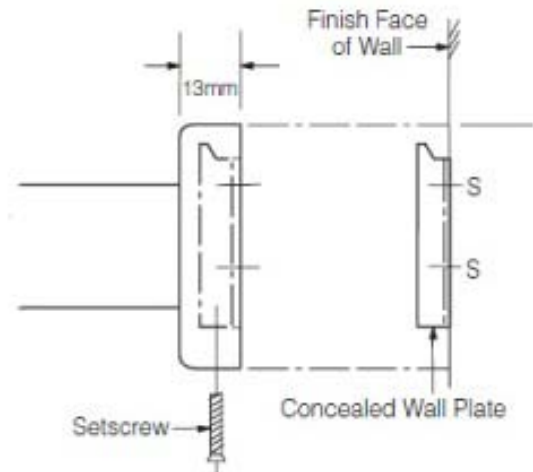

Rear View of Cover Flange & Mounting Arm, showing position of Concealed Wall Plate (Note Set-screw)

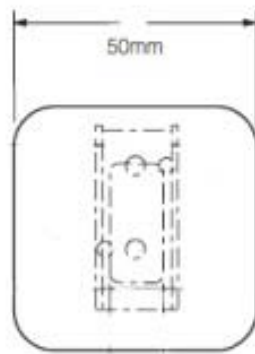

INSTALLATION

1. To remove concealed wall plate from back of cover flange and mounting arm, loosen set-screw. Mount wall plate, with prongs facing upwards, and loosely secure using appropriate fixings suitable to substrata at points indicated by S as noted above. Ensure level, tighten fixings then fit cover flange & mounting arm over wall plate and secure into position by tightening set-screw at base of flange.
2. Measure length of rail, locate and mark fixing point for 2nd cover flange and mounting arm. Secure wall plate as noted above, fit rail into both ends of mounting arms and then fit 2nd cover flange and mounting arm over wall plate and secure into position by tightening set-screw at base of flange