



# ULTIMATE HEAVY DUTY CODELOCK



Locks in the CL5000 range are the ultimate standalone electronic door locks. Top of the range digital locks tested to Grade 2 ANSI A156.2/A156.25.

Heavy duty locks for use in high traffic applications. The stylish design incorporates all the features of CL2000 and CL4000, in a larger, more robust assembly. Unlike the other electronic locks, the CL5000 has a conventional 3x4 button keypad layout for instant familiarity, providing quick programming with a multiple range of functions. Particularly suitable for use in health, educational, commercial and residential environments.



Easy to  
install



On the door  
programming



Two year  
guarantee\*

80

Up to 80  
User Codes

## FEATURES

- Key override and front cylinder change
- Suitable for wooden doors between 35mm - 60mm thick
- PVD low maintenance finish
- User Codes 4, 5 or 6 digits long
- Allows up to 10 one time User Codes
- Up to 200,000 operations from 4 x AA batteries (supplied)
- Remote release connections
- Suitable for internal and external use
- Tamper time out and low battery warning
- Locked and unlocked LED indicator option
- Tested to Grade 2 ANSI A156.2 / A156.25
- UL/ULC Fire Rating 3 hours (when fitted with US fire kit)
- Codelocks Fire Kit Packs can be fitted to latch locks for 30 or 60 minute fire doors. Tested in accordance with BS EN 1634-1:2008

Tech  
Spec

# LOCK MODELS



**Panic Access Kit**  
Front plate only. Install with new or existing panic equipment. The follower on the panic equipment must return to square to align with follower on the lock.



**Mortice Latch**  
Medium duty tubular mortice latch retracts via the outside knob after a valid code input. When the door closes, the spring latch will lock the door.




**Back to Back Option (BB)**  
Medium duty tubular mortice latch. Two coded plates for installation on both sides of the door. Provides coded access in both directions.




**Mortice Lock**  
Euro profile mortice sash lock with deadbolt and latchbolt. With the deadbolt thrown it denies access to code users. Supplied with Euro profile cylinders and three keys.

## Two Mortice Latch Sizes Available:



Requires 25mm x 82mm (1" x 3 1/4") hole



Requires 25mm x 92mm (1" x 3 5/8") hole

# ADDITIONAL FEATURES

## Storeroom Function

Fitted as standard i.e. the latch can be retracted by turning the key.

## Code Management

Program and manage codes via the keypad while the lock is on the door. All models also feature a Code Free option.

## Classroom Function


Tailpiece supplied to allow (when fitted) lock to be left in Code Free option when the key is removed.

## Remote Release


Two REM ports are provided for connection to external switches or alarm systems.

# PRODUCT DIMENSIONS

CL5010

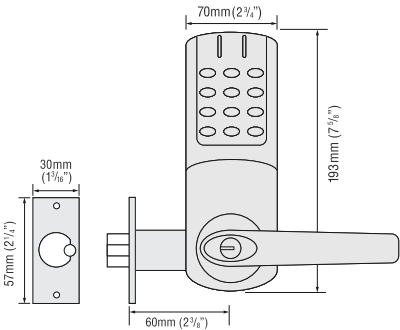

CL5020



# TECHNICAL SPECIFICATIONS

| FEATURE             | DESCRIPTION                                                                                                                   |
|---------------------|-------------------------------------------------------------------------------------------------------------------------------|
| Spindle Type        | Two part 8mm (5/16") spring loaded spindle                                                                                    |
| Operations          | Up to 200,000 per set of 4 x AA batteries, 8 x AAA for CL5010 BB model                                                        |
| Mortice Latch       | Medium duty latch with 'anti-shim' plunger                                                                                    |
| Low Battery Warning | Red LED will flash on opening to indicate low battery                                                                         |
| Buttons             | Individual stainless steel buttons                                                                                            |
| Material            | Zinc Alloy                                                                                                                    |
| Finish              | PVD (Physical Vapour Deposition), low maintenance                                                                             |
| Finish Colour       | Brushed Steel and Polished Brass                                                                                              |
| Non Handed          | Locks will fit doors hung on the left or right                                                                                |
| Door Thickness      | 35mm - 60mm (1 3/8" - 2 3/8")                                                                                                 |
| Key Override        | As standard and front cylinder change                                                                                         |
| Keyed Alike         | Locks can be supplied keyed alike on request                                                                                  |
| Memory              | Stores up to 80 User Codes                                                                                                    |
| Fitting Options     | Vertical only                                                                                                                 |
| Suitable For        | Internal and external use                                                                                                     |
| Standards           | Codelocks Fire Kits can be fitted to latch locks for 30 or 60 minute fire doors. Tested in accordance with: BS EN 1634-1:2008 |



Scan to shop!

[www.codelocks.com](http://www.codelocks.com)

